

BP26P3BC Tech Sheet

Customer: Balboa Water Group

Part Number: 55976-03 Incoloy, 55977-03 Titanium

Custom Box Overlay

Box Overlay Part Number N/A

CE System Model: BP26-BP26P3BC-RCA3.0K

Software ID: M100_215 V6

Software Version: 6.0

File Name: BP2600_6.0_BP26P3BC_4.hex

Configuration Signature: 9E808063

Eng. Project Number: 3735

Base PCBA: 56088-03

Bare Board: 22614_A

Control Panels:

TP800 50261

TP900 50262

Software Version 1.2 and later

Auxiliary Panels

See Page 20

System Revision History

Part #	EPN	Date	Originator	Changes Made
55976	3343	06-30-10	BWG	Initial Release Generic BP2600
55976-01	3458	08-17-10	BWG	Hex file change to fix panel maps
55976-01	3458	08-31-10	BWG	Fix typos
55976-02	3479	10-11-10	BWG	RMA Tester and eFAST compatibility added. Light output changed to 1A.
55976-03	3735	12-02-11	BWG	Additional iPhone app support. Add TP800 Panel functionality.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.



Basic Functions Setup 1

Power Requirements:

Single Service [3 wires (line, neutral, ground)]

230VAC, 50Hz, 1p, 32A, (Circuit Breaker rating = 40A max.)

Dual Service N/A

3-Service [5 wires (line 1, line 2, line 3, neutral, ground)]

400VAC, 50Hz, 3Np, 16A, (Circuit Breaker rating = 20A max each phase line.)

IMPORTANT - Service must include a neutral wire, with a line to neutral voltage of 230VAC.


System Outputs:

Pump 1	230VAC	2-Speed	10A max*	15-minute timer for High Speed, 15-Minute timer for Low Speed
Pump 2	230VAC	2-Speed	10A max*	15-minute timer
Pump 3	230VAC	2-Speed	10A max*	15-minute timer
Blower	230VAC	1-Speed	8A max	15-minute timer
Circ Pump	230VAC	1-Speed	2A max	Programmable Filtration Cycles + Polling
	This is the heater pump Must deliver 20 GPM through heater			
Ozone	230VAC		.5A max	Separate Relay
Spa Light	10VAC	On/Off	1A max	240-minute timer.
A/V (Stereo)	230VAC	Hot	5A max	Always on
Heater	3.0kW @ 240VAC max			

*Pumps using more than 10A may require special configuration. Contact Balboa Water Group for more information.

Hardware Setup

Wiring Diagram

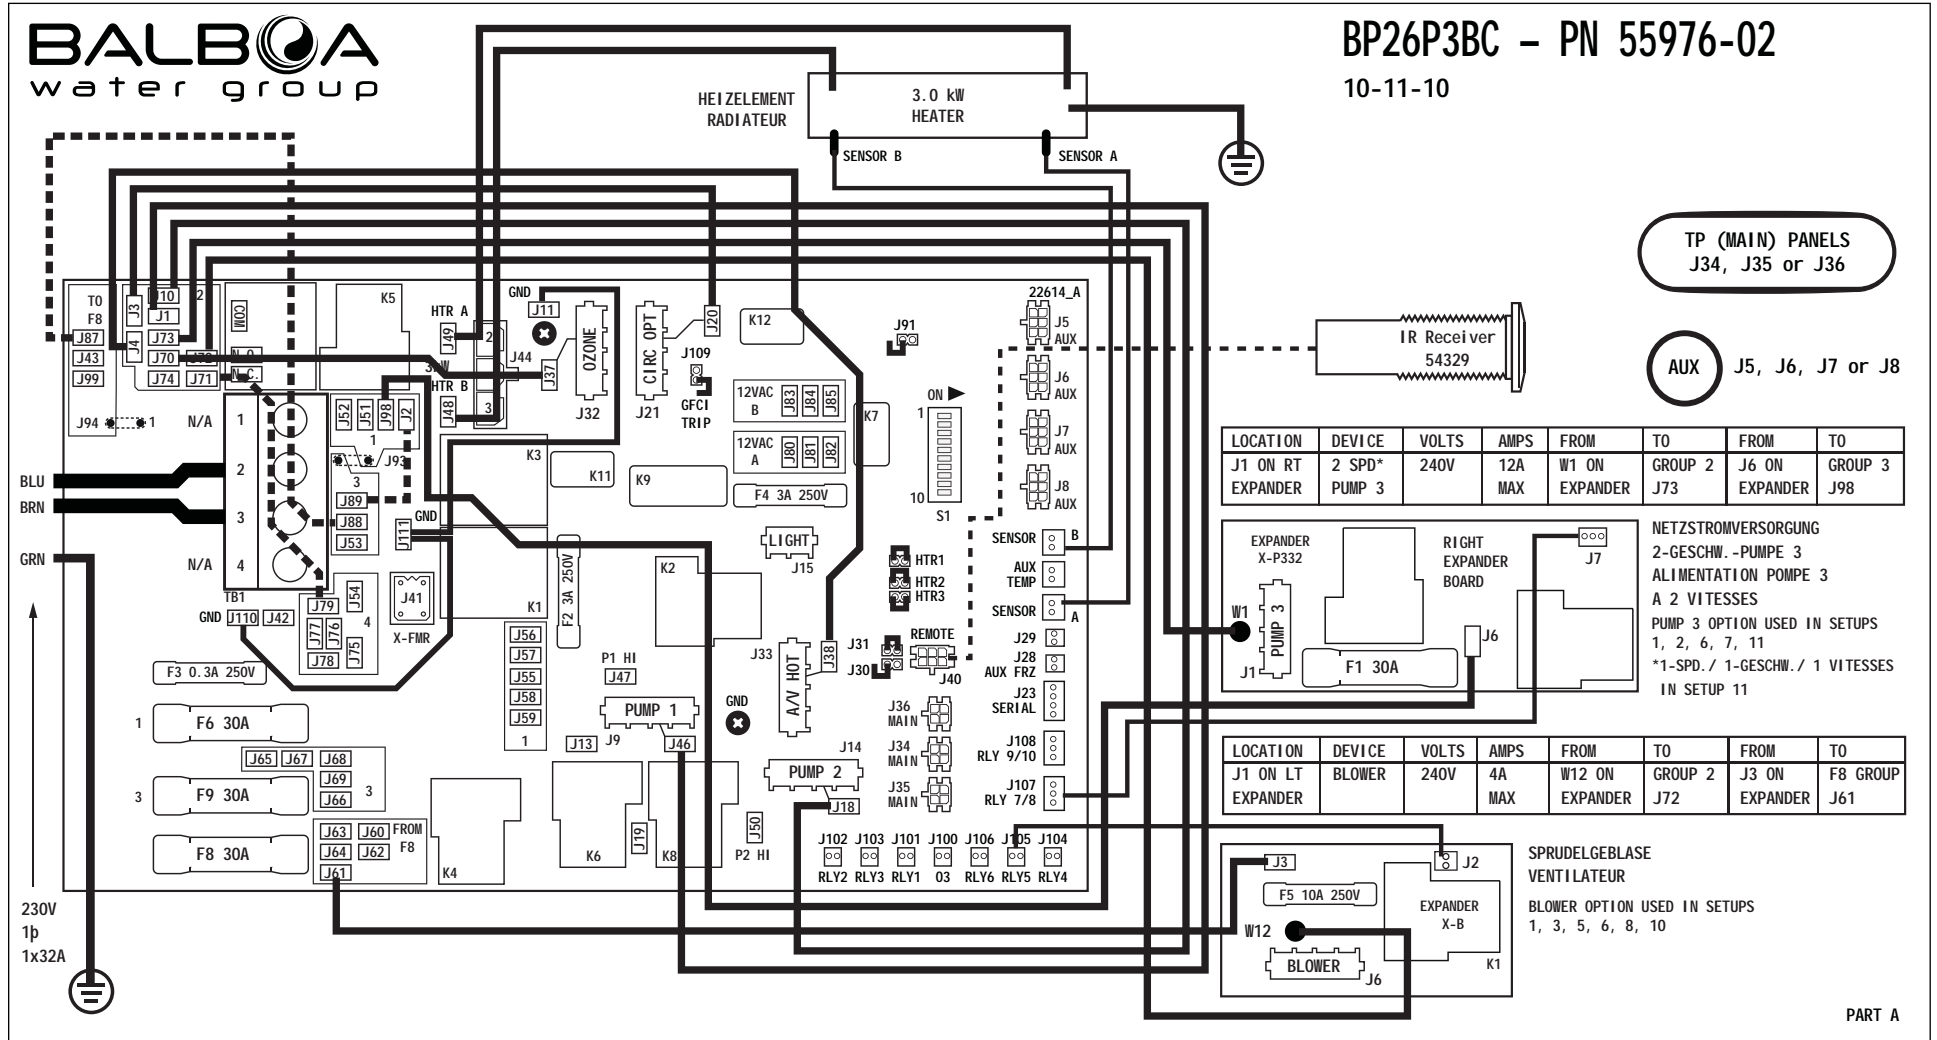

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending.

© Copyright 2009 Balboa Water Group.

BALBOA
water group

Hardware Setup

Settings

SINGLE SERVICE 230V 1p / 1x32A, THREE-SERVICE 230V 1p / 3x16A

LOCATION	DEVICE
J9	NETZSTROMVERSORGUNG 2-GESCHW. -PUMPE 1 ALIMENTATION POMPE 1 A 2 VITESSES 2-SPEED PUMP 1
J14	NETZSTROMVERSORGUNG 2-GESCHW. -PUMPE 2 ALIMENTATION POMPE 2 A 2 VITESSES 2-SPEED PUMP 2
J15	10V BELEUCHTUNG ECLAIRAGE BAIN HYDRO SPA LIGHT
J21	KREISLAUF PUMPE POMPE DE CIRCULATION CIRC PUMP
J32	OZONGENERATOR GENERATOROZONE OZONE GENERATOR
J33	TV / AV
J40	IR RECIEVER
J41	TRANSFORMATOR TRANSFORMATEUR TRANSFORMER
J5 J6 J7, J8	AUX PANEL(S) - AX10, AX20, AX30, AX40

230V 1p / 1x32A

1-SPD. / 1-GESCHW. / 1 VITESSES IN SETUP 11

CIRC PUMP OPTION PROGRAMMABLE FILTRATION CYCLES + POLLING USED IN SETUPS 1, 2, 3, 4, 5, 11

SWITCHBANK S1 OFF		SWITCHBANK S1 ON	
TEST MODE OFF	◀ A1	TEST MODE ON	
DON'T ADD 1 HS PUMP W/HTR	◀ A2	ADD 1 HS PUMP WITH HEAT	
DON'T ADD 2 HS PUMPS W/HTR	◀ A3	ADD 2 HS PUMPS WITH HEAT	
DON'T ADD 4 HS PUMPS W/HTR	◀ A4	ADD 4 HS PUMPS WITH HEAT	
SPECIAL AMPERAGE RULE A*	A5 ▶	SPECIAL AMPERAGE RULE B*	
STORE SETTINGS**	◀ A6	MEMORY RESET**	
NOT ASSIGNED	◀ A7	NOT ASSIGNED	
NOT ASSIGNED	◀ A8	NOT ASSIGNED	
NOT ASSIGNED	◀ A9	NOT ASSIGNED	
NOT ASSIGNED	◀ A10	NOT ASSIGNED	

*SWITCH # 5 HAS NO EFFECT IN SETUP 11.
**SWITCH # 6 SHOULD BE SET TO OFF UPON FINAL INSTALLATION.

PUMP 1 LOW TIMEOUT IS 15 MINUTES FOR CIRC SYSTEMS. PUMP 1 LOW TIMEOUT IS 120 MINUTES FOR NON-CIRC SYSTEMS.

SETUP #	CIRC PUMP	PUMP 1	PUMP 2	PUMP 3	BLOWER
1	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	2-SPEED	2-SPEED	1-SPEED
2	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	2-SPEED	2-SPEED	
3	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	2-SPEED		1-SPEED
4	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	2-SPEED		
5	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	1-SPEED		1-SPEED
6		2-SPEED	2-SPEED	2-SPEED	1-SPEED
7		2-SPEED	2-SPEED	2-SPEED	
8		2-SPEED	2-SPEED		1-SPEED
9		2-SPEED	2-SPEED		
10		2-SPEED	1-SPEED		1-SPEED
11	PROGRAMMABLE FILTRATION + POLLING	1-SPEED	1-SPEED	1-SPEED	

230V 3p / 3x16A

230V 3p / 3x16A

SWITCHBANK S1 OFF		SWITCHBANK S1 ON	
TEST MODE OFF	◀ A1	TEST MODE ON	
DON'T ADD 1 HS PUMP W/HTR	◀ A2	ADD 1 HS PUMP WITH HEAT	
DON'T ADD 2 HS PUMPS W/HTR	◀ A3	ADD 2 HS PUMPS WITH HEAT	
DON'T ADD 4 HS PUMPS W/HTR	◀ A4	ADD 4 HS PUMPS WITH HEAT	
SPECIAL AMPERAGE RULE A*	◀ A5	SPECIAL AMPERAGE RULE B*	
STORE SETTINGS**	◀ A6	MEMORY RESET**	
NOT ASSIGNED	◀ A7	NOT ASSIGNED	
NOT ASSIGNED	◀ A8	NOT ASSIGNED	
NOT ASSIGNED	◀ A9	NOT ASSIGNED	
NOT ASSIGNED	◀ A10	NOT ASSIGNED	

*SWITCH # 5 HAS NO EFFECT IN SETUP 11.
**SWITCH # 6 SHOULD BE SET TO OFF UPON FINAL INSTALLATION.

INSTEAD OF SETUP #1, THIS SYSTEM IS CONFIGURED IN SETUP #:

SYSTEM WILL BE IN SETUP #1 UNLESS MARKED OTHERWISE

FOR SUPPLY CONNECTIONS, USE CONDUCTORS SIZED ON THE BASIS OF 60°C AMPACITY BUT RATED MINIMUM OF 90°C.

USE COPPER CONDUCTORS ONLY. EMPLOYER UNIQUEMENT DES CONDUCTEURS DE CUIVRE.

TORQUE RANGE FOR MAIN TERMINAL BLOCK (TB1): 27-30 IN. LBS. (31.1-34.5 kg cm)

BALBOA
water group

BP26P3BC – PN 55976-02
10-11-10

PART B

Setup Reference Table

Setup #	Circ Pump	Pump 1	Pump 2	Pump 3	Blower	Temp Scale
1	Programmable Filtration + Polling	2-Speed	2-Speed	2-Speed	1-Speed	°C
2	Programmable Filtration + Polling	2-Speed	2-Speed	2-Speed		°C
3	Programmable Filtration + Polling	2-Speed	2-Speed		1-Speed	°C
4	Programmable Filtration + Polling	2-Speed	2-Speed			°C
5	Programmable Filtration + Polling	2-Speed	1-Speed		1-Speed	°C
6		2-Speed	2-Speed	2-Speed	1-Speed	°C
7		2-Speed	2-Speed	2-Speed		°C
8		2-Speed	2-Speed		1-Speed	°C
9		2-Speed	2-Speed			°C
10		2-Speed	1-Speed		1-Speed	°C
11	Programmable Filtration + Polling	1-Speed	1-Speed	1-Speed		°C

System is shipped in Setup 1

Pump 1 Low timeout is 15 minutes for Circ systems.


Pump 1 Low timeout is 120 minutes for Non-Circ systems.

Changing Software Setups

Test Menu Access (S1, Switch 1 ON) *Service Technician ONLY.*


DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!

While the system is running, move DIP Switch 1 (on S1 on the Main circuit board) to ON. The system will enter Test Mode. Moving DIP Switch 1 to OFF will exit Test Mode.



Software Setups

Under the TEST Menu, the Setup screen will allow changing the Setup from 1 to any number established by the Manufacturer. Changing the Setup may require wiring changes as well.

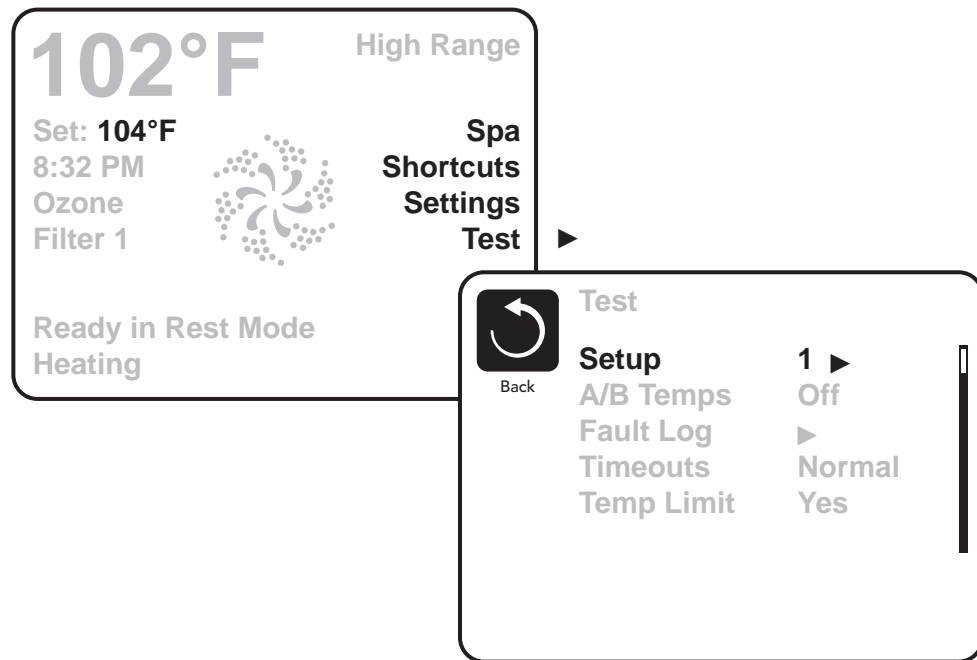

Equipment Expansion


Expansion Features

Control Connection	Default	Fuse
Relay 1 (J101)	Undefined	None
Relay 2 (J102)	Undefined	None
Relay 3 (J103)	Undefined	None
Relay 4 (J104)	Undefined	None
Relay 5 (J105)	Blower	10A
Relay 6 (J106)	Undefined	None
Relay 7/8 (J107)	Pump 3	30A
Relay 9/10 (J108)	Undefined	None

DIP Switch Functions

Fixed-function DIP Switches

- A1 Test Mode (normally Off).
- A2 In "ON" position, add one high-speed pump (or blower) with Heater.
- A3 In "ON" position, add two high-speed pumps (or 1 HS Pump and Blower) with Heater.
- A4 In "ON" position, add four high-speed pumps (or 3 HS Pumps and Blower) with Heater.
- A5 In "ON" position, enables Special Amperage Rule B. See Special Features section under Configuration Options for functionality with your system.
In "OFF" position, enables Special Amperage Rule A.
- A6 Persistent memory reset (Used when the spa is powering up to restore factory settings as determined by software configuration).









A2, A3, and A4 work in combination to determine the number of high-speed devices and blowers that can run before the heat is disabled. i.e. A2 and A3 in the ON position and A4 in the OFF position will allow the heater to operate with up to 3 high-speed pumps (or two HS Pumps and Blower) running at the same time. Heat is disabled when the fourth high-speed pump or blower is turned on.

Note: A2/A3/A4 all off = No heat with any high-speed pump or blower.

Undesignated switches are not assigned a function.

Jumper Definitions

J93 J94	Must be soldered in place for UL and cUL Note: <i>Single service, 50A or 60A.</i>	J94  J93 
J109	GFCI Test/Trip Enable Note: <i>This feature must be enabled in software as well.</i>	J109 
J91	Real Time Clock Enable/Disable Note: <i>This Jumper should NOT be shorted when the Control Panel can display time of day.</i>	J91 
J30	Do Not Use	
J31	Jumper on 1 pin with a 2.0kW or smaller heater Jumper on 2 pins with a 3.0kW or higher heater	J31 
J29	Do Not Use	J29 
HTR 1, 2, 3	Heater Type Settings. Note: <i>Factory Configured.</i>	

Warning!

Setting DIP switches or jumpers incorrectly may cause abnormal system behavior and/or damage to system components. Refer to Switchbank illustration on Wiring Configuration page for correct settings for this system. Contact Balboa if you require additional configuration pages added to this tech sheet.

BP2600 Configuration Options

General Features

Feature	Default
Pump 1 in Filter Cycle (Circ Only)	No
Pump 1 Low Timer	<i>15 Minutes with Circ</i> <i>120 Minutes Non-Circ</i>
General Pump Timer	15 Minutes
Blower Timer	15 Minutes
Mister Timer	15 Minutes
Light Timer	240 Minutes
Circ (when enabled)	Programmable + Polling
Cleanup Cycle	<i>30 Minutes</i>
Cleanup as Preference setting	<i>Yes</i>
Ozone	Always
Ozone Suppression	OFF
Pump Purge	60 Seconds
Blower Purge	30 Seconds
Mister Purge	5 Seconds

Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

BP2600 Configuration Options

Temperature Features

Feature	Default
Temperature Display	<i>°C in Setups 1-10</i>

All temperatures must be specified in °F. The system converts °F to °C dynamically. If Celsius is required for default settings, choose a desired °C value that (after rounding) corresponds to a Fahrenheit value.

°C	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
°F	39	41	43	45	46	48	50	52	54	55	57	59	61	63	64	66	68	70	72
°C	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
°F	73	75	77	79	81	82	84	86	88	90	91	93	95	97	99	100	102	104	

Hi-Range Min. Set Temp	80°F
Hi-Range Max. Set Temp	104°F
Hi-Range Default Temp*	100°F
Lo-Range Min. Set Temp	50°F
Lo-Range Max. Set Temp	99°F
Lo-Range Default Temp*	70°F
Freeze Threshold	44°F
Temp Lock Type	Temp + Settings

**May be changed by end-user (if enabled)*

Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.



BP2600 Configuration Options

Time Features

Feature	Default
Time Format*	<i>24 Hour</i>
Filter 1 Start Hour*	20:00 (8:00 PM)
Filter 1 Duration*	2 Hours
Filter Cycle 2 Default*	OFF
Filter 2 Start Hour*	08:00 (8:00 AM)
Filter 2 Duration*	15 Minutes
Light Cycle	Disabled
Light Cycle Default*	OFF
Light Cycle Start Hour*	21:00 (9:00 PM)
Light Cycle Duration*	15 Minutes

**May be changed by end-user (if enabled)*

Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

BP2600 Configuration Options

Reminder Features

Feature	Default
Reminders Shown*	<i>Yes</i>
Check pH	<i>OFF</i>
Check Sanitizer	<i>OFF</i>
Clean Filter	30 Days
Test GFCI	<i>65 Days</i>
Drain Water	<i>100 Days</i>
Change Cartridge	OFF
Clean Cover	<i>OFF</i>
Treat Wood	<i>OFF</i>
Change Filter	365 Days

**May be changed by end-user (if enabled)*

Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

BP2600 Configuration Options

Special Features

Feature

Default

Special Amperage Rule A

No Limitation

Special Amperage Rule B

2 HS Pumps Max in Setups 1-10

No limitation in Setup 11

Drain Mode

Disabled

Demo Mode

Disabled

Automatic GFCI Test

Disabled

Ozone Slaved to Heater Pump

No

Dual Voltage Heater

Always Input Voltage

Safety Suction

Disabled

TP800 Panel Configuration

Button Layout Table

Button #	Pump 3 & Blower Setup 1, 6	Pump 3 & NO Blower Setups 2, 7, 11	NO Pump 3 & Blower Setups 3, 5, 8, 10	NO Pump 3 & NO Blower Setups 4, 9
1	N/A	N/A	N/A	N/A
2	Jets 1	Jets 1	Jets 1	Jets 1
3	Jets 2	Jets 2	Jets 2	Jets 2
4	Jets 3	Jets 3	Blower	Light 1
5	Blower	Light 1	Light 1	Invert
6	Light 1	Invert	Invert	(Circ Icon)
7	Invert	(Circ Icon)	(Circ Icon)	Undefined
8	(Circ Icon)	Undefined	Undefined	Undefined
9	Undefined	Undefined	Undefined	Undefined
10	Undefined	Undefined	Undefined	Undefined
11	N/A	N/A	N/A	N/A
12	N/A	N/A	N/A	N/A
13	Jets 1	Jets 1	Jets 1	Jets 1
14	Jets 2	Jets 2	Jets 2	Jets 2
15	Blower	Jets 3	Blower	Undefined
16	Light 1	Light 1	Light 1	Light 1
B1	Jets 1	Jets 1	Jets 1	Jets 1
B2	Jets 2	Jets 2	Jets 2	Jets 2
B3	Blower	Jets 3	Blower	Undefined
B4	Light 1	Light 1	Light 1	Light 1




A Circ Icon will appear when a Circ Pump is configured using Setups 1, 2, 3, 4, 5, 11

TP800 Panel Configuration




TP800

Note: Buttons 11 and 12 are not used in this configuration. Button 1 is fixed.

Spa Screen



Shortcuts Screen





Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2009 Balboa Water Group.

TP900 Panel Configuration



Button Layout Table

Button #	Pump 3 & Blower Setup 1, 6	Pump 3 & NO Blower Setups 2, 7, 11	NO Pump 3 & Blower Setups 3, 5, 8, 10	NO Pump 3 & NO Blower Setups 4, 9
1	N/A	N/A	N/A	N/A
2	Jets 1	Jets 1	Jets 1	Jets 1
3	Jets 2	Jets 2	Jets 2	Jets 2
4	Jets 3	Jets 3	Blower	Light 1
5	Blower	Light 1	Light 1	Invert
6	Light 1	Invert	Invert	(Circ Icon)
7	Invert	(Circ Icon)	(Circ Icon)	Undefined
8	(Circ Icon)	Undefined	Undefined	Undefined
9	Undefined	Undefined	Undefined	Undefined
10	Undefined	Undefined	Undefined	Undefined
11	N/A	N/A	N/A	N/A
12	N/A	N/A	N/A	N/A
13	Jets 1	Jets 1	Jets 1	Jets 1
14	Jets 2	Jets 2	Jets 2	Jets 2
15	Blower	Jets 3	Blower	Undefined
16	Light 1	Light 1	Light 1	Light 1

Spa Screen



Shortcuts Screen



A Circ Icon will appear when a Circ Pump is configured using Setups 1, 2, 3, 4, 5, 11

BP2600 Configuration Options

Auxilliary Panel Features on Bank 1*

Feature	Default
Aux Button A1	Jets 1
Aux Button A2	Jets 2
Aux Button A3	Jets 3
Aux Button A4	Light

Auxilliary Panel Features on Bank 2*

Feature	Default
Aux Button A5	Jets 1
Aux Button A6	Jets 2
Aux Button A7	Blower
Aux Button A8	Light


*Bank 1 consists on J5 and J6 on the Main Circuit Board.
Bank 2 consists on J7 and J8 on the Main Circuit Board.
Aux Connection Splitter PN4XXXX may be required.

BP2600 Configuration Options

Auxilliary Panel Features

AX10 Panels on Bank 1*

A1, AX10A1	No O/L	52803	
A2, AX10A2	No O/L	52804	
A3, AX10A3	No O/L	55805	▶
A4, AX10A4	No O/L	52806	



Call Customer Service for additional information about Auxiliary Panels.

Auxiliary Panel Part Number _____

Overlay Part Number _____


AX10 Panels on Bank 2*

A5, AX10A1	No O/L	52803
A6, AX10A2	No O/L	52804
A7, AX10A3	No O/L	52805
A8, AX10A4	No O/L	52806

*Bank 1 consists on J5 and J6 on the Main Circuit Board.
Bank 2 consists on J7 and J8 on the Main Circuit Board.
Aux Connection Splitter PN4XXXX may be required.

AX20


AX20 A1A2	No O/L	52800
AX20 A1A3	No O/L	52801
AX20 A1A4	No O/L	52802

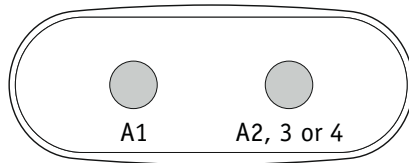

AX20 Auxiliary Panel plugged into Bank 1 will operate A1 + A2, A3 or A4.
AX20 Auxiliary Panel plugged into Bank 2 will operate A5 + A6, A7 or A8.

AX40

AX40	No O/L	52799
------	--------	-------

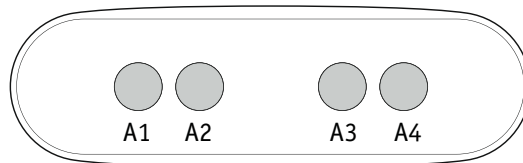


AX40 Auxiliary Panel plugged into Bank 1 will operate A1 + A2, A3 and A4.
AX40 Auxiliary Panel plugged into Bank 2 will operate A5 + A6, A7 and A8.

BP2600 Configuration Options

Remote Panel Features

Feature	Default
Remote Button A1	Jets 1
Remote Button A2	Jets 2
Remote Button A3	Jets 3
Remote Button A4	Blower
Remote Button A5	Light
Remote Button A6	Undefined
Remote Button A7	Undefined
Remote Button A8	Undefined

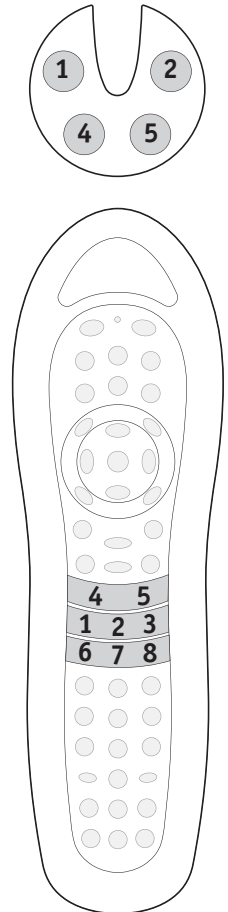

Remote Panel Part Number _____
 Overlay Part Number _____